




Opens the future

KIT SOLUTIONS

Complete range available on General Catalogue.



Opens the future

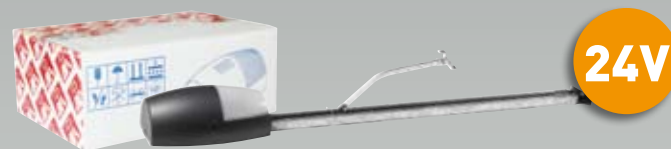

24V

R935014 70001

BOTTICELLI 2.9 BELT KIT

Up to 60 Kg - 24V

The KIT contains:

- 1 x BOTTICELLI operator, with built-in control board and rolling code receiver
- 2 x 12V MITTO 2, dual channel rolling code transmitter
- 1 x BIN CINGHIA 2900: 2900 belt track

R935013 70001

BOTTICELLI 2.9 CHAIN KIT

Up to 60 Kg - 24V

The KIT contains:

- 1 x BOTTICELLI operator, with built-in control board and rolling code receiver
- 2 x 12V MITTO 2, dual channel rolling code transmitter
- 1 x BIN CATENA 2900: 2900 chain track



24V


R925001 70001

DEIMOS BT KIT

Up to 500kg - 24V voltage

The KIT contains:

- 1 DEIMOS BT operator, with built-in control board and rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- CP Plastic rack, 4m length, 22x22mm cross section, 4 pitch, boltable through adjustment slots

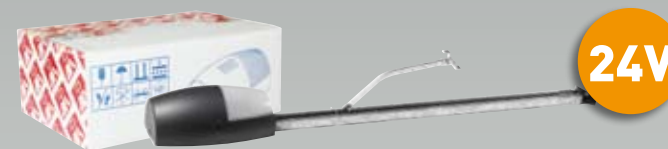

24V

R935016 70001

BOTTICELLI 3.5 BELT KIT

Up to 60 Kg - 24V

The KIT contains:

- 1 x BOTTICELLI operator, with built-in control board and rolling code receiver
- 2 x 12V MITTO 2, dual channel rolling code transmitter
- 1 x BIN CINGHIA 3500: 3500 belt track


R935015 70001

BOTTICELLI 3.5 CHAIN KIT

Up to 60 Kg - 24V

The KIT contains:

- 1 x BOTTICELLI operator, with built-in control board and rolling code receiver
- 2 x 12V MITTO 2, dual channel rolling code transmitter
- 1 x BIN CATENA 3500: 3500 chain track

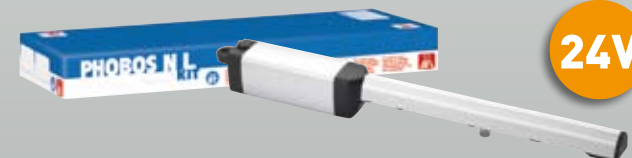

24V

R935017 70001

PHOBOS N L BT DOUBLE KIT

Up to 5 m, 250 kg - Voltage 24V

The KIT contains:

- 2 Phobos N L BT operators.
- 1 LIBRA CMA, control unit with built-in rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- 2 SFR L, adjustable back fixing bracket

BFT AUTOMATION AUSTRALIA PTY LTD.

29 Bentley Street, Wetherill Park NSW 2164

Tel. +61 1300 729 344, +61 (0) 2 9757 0677

Fax +61 (0) 2 9725 4225


sales@bftaustralia.com.au

www.bftaustralia.com.au

D882467 02201

HOME AUTOMATION KIT

Complete Automation Solutions
for Garage Doors and Gates



Opens the future




www.bftaustralia.com.au

RESIDENTIAL USE

BOTTICELLI

ELECTROMECHANICAL OPERATOR
FOR SPRING UP AND OVER DOORS, AND SECTIONALS

24V

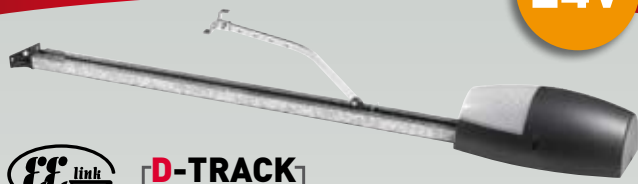

D-TRACK

- 24V electromechanical chain or belt driven operator, for sectional and up and over doors for residential use, maximum traction force **600 N (60 kg)**.
- Limit switch controlled by an encoder, mechanical stop on opening, obstruction detection system controlled by the control panel; built-in radio receiver mounted on the motor, it can recognize up to **64** remote controls.

DESCRIPTION	VOLTAGE	FORCE	CONTROL UNIT	REACTION TO IMPACT	USE
	(V)	(kg)			
<input type="checkbox"/> BOTTICELLI P915194 00002	24	60	VENERE* (incorporated)	stop and reverse with dynamic curve force control	intensive
<input type="checkbox"/> BOTTICELLI VENERE D P915194 00003	24	60	VENERE D (incorporated)		intensive

*can recognize up to 10 remote controls.

RESIDENTIAL USE

DEIMOS BT

ELECTROMECHANICAL OPERATOR
FOR SLIDING GATES

24V



EE link

- **24V** electromechanical operator for intensive use for gates up to **500 Kg (BT)**.
- Electromechanical limit switches and electronic slow-down system.
- Control unit (**QSCD-MA**) with obstruction detection and with built-in receiver.


DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(kg)		(m/min)		
<input type="checkbox"/> DEIMOS BT P925178 00005	24	500	QSCD MA (incorporated)	12	motion reverse on obstruction detection	intensive

RESIDENTIAL USE

PHOBOS N L BT

LINEAR ELECTROMECHANICAL OPERATOR
FOR SWING GATES

24V

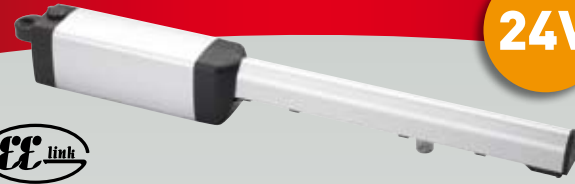

EE link

- **24V** electromechanical operator for residential use for leaves up to **5 m (250 kg)**.
- Magnetic limit switches and electronic obstruction detection device by the control panel.
- Total useful stroke **410 mm** and **18 sec** opening time.

DESCRIPTION	VOLTAGE	LEAF LENGTH	MAX LEAF WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(m)	(kg)		(s)		
<input type="checkbox"/> PHOBOS N L BT P935074 00003	24	5	250	LIBRA C MA (recommended)	18	motion reverse on obstruction detection	intensive

ACCESSORIES



Opens the future

RAY X	RAY X: (240 V D113719 00002 - 24 V D113719 00003) Flashing light with built-in antenna for 24V and 240V operators	
MITTO 2	MITTO: (MITTO2 D111750 - MITTO4 D111751) Two and four channel 433 MHz rolling code transmitter	
T BOX	T BOX: (P121019) 433 MHz wireless digipad. 10 channels and 100 codes capacity, range up to 140 m, backlit touchpad.	
SEK	SEK: (P121017) Outdoor use shock proof wall mounted key switch.	
AEL 433	AEL 433: (D113632) Radiocontrol antenna 433MHz, with 4m cable	
CELLULA 130	CELLULA 130: (P111273) Self-aligning pair of photocells for outdoor use (range 30 m). Power supply 24V AC/DC.	
CELLULA 180	CELLULA 180: (P111452) Set of adjustable photocells (180° hor./20°vert.) for outdoor use (range 30 m). Power supply 24V AC/DC.	
DCW	DCW: (P111410) Wireless photocell (battery operated transmitter and cabled receiver) capable of managing a resistive or an infrared safety edge. Adjustable (180° hor/20° vert) and compliant to EN 12978.	