



Opens the future


ACCESSORIES



Opens the future

RAY X

RAY X:
Flashing light with built-in antenna for 24V and 240V operators.



240 V D113719 00002
24 V D113719 00003



AEL 433 D113632

AEL 433:
Radiocontrol antenna 433MHz, with 4m cable

AEL 433

MITTO 2

MITTO:
Two and four channel 433 MHz rolling code transmitter



MITTO2 D111750
MITTO4 D111751



P111273

CELLULA 130:
Self-aligning photocells for outdoor use (range 30 m). Power supply 24V AC/DC.

CELLULA 180

T BOX

T BOX:
433 MHz wireless digipad. 10 channels and 100 codes capacity, range up to 140 m, backlit touchpad.



P121019



P111452

CELLULA 180:
Set of adjustable photocells (180° hor./20°vert.) for outdoor use (range 30 m). Power supply 24V AC/DC.

DCW

SEK

SEK:
Outdoor use shock proof wall mounted key switch.



P121017



P111410

DCW:
Wireless photocell (battery operated transmitter and wired receiver) capable of managing a resistive or an infrared safety edge. Adjustable (180° hor/20° vert) and compliant to EN 12978.

DCW COVER

KIT SOLUTIONS

Complete range available on General Catalogue.



Opens the future



R925001 70001

DEIMOS BT KIT

Up to 500kg - 24V voltage

The KIT contains:

- 1 DEIMOS BT operator, with built-in control board and rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- CP Plastic rack, 4m length, 22x22mm cross section, 4 pitch, bolttable through adjustment slots




R925002 70001

DEIMOS SR KIT

Up to 500kg - 240V voltage

The KIT contains:

- 1 DEIMOS SR operator, with built-in control board and rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- CP Plastic rack, 4m length, 22x22mm cross section, 4 pitch, bolttable through adjustment slots

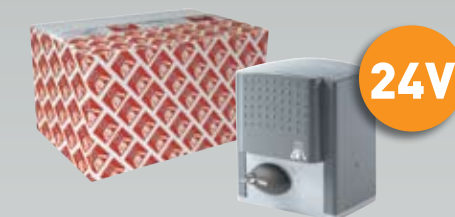

R935019 70001

ARES 1000 BT KIT

Up to 1000kg - 24V voltage

The KIT contains:

- 1 ARES 1000 BT operator, with built-in control board and rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- CVZ Galvanized steel rack, 4m length, 30x12mm cross section, 4 pitch, bolttable through steel spacers (bolts and spacers provided)



R925004 70001

ICARO KIT

Up to 2000kg - 240V voltage


The KIT contains:

- 1 ICARO operator, with built-in control board and rolling code receiver.
- 2 MITTO 2 12V, dual channel rolling code transmitter.
- CVZ Galvanized steel rack, 4m length, 30x12mm cross section, 4 pitch, bolttable through steel spacers (bolts and spacers provided)

AUTOMATION FOR SLIDING GATES



Opens the future

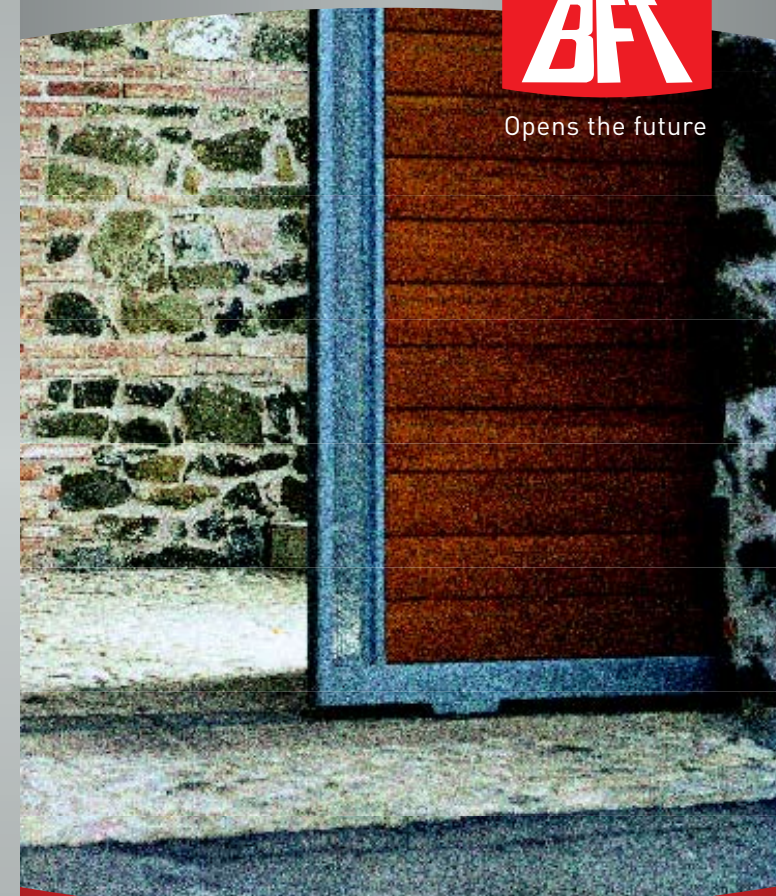

www.bftaustralia.com.au

BFT AUTOMATION AUSTRALIA PTY LTD.

29 Bentley Street, Wetherill Park NSW 2164

Tel. +61 1300 729 344, +61 (0) 2 9757 0677

Fax +61 (0) 2 9725 4225

sales@bftaustralia.com.au

www.bftaustralia.com.au

RESIDENTIAL USE

DEIMOS

ELECTROMECHANICAL OPERATOR FOR SLIDING GATES



- **240V** electromechanical operators for residential use for gates up to **800 Kg**.
- Electromechanical limit switches.
- Control unit **(ALPHA)** with built-in receiver.

DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(kg)		(m/min)		
<input type="checkbox"/> DEIMOS P925197 00001	240	500	ALPHA (incorporated)	8.5	mechanical clutch	semi-intensive
<input type="checkbox"/> DEIMOS 700 P925196 00001	240	700	ALPHA (incorporated)	8.5	mechanical clutch	semi-intensive
<input type="checkbox"/> DEIMOS 800 F P925200 00002	240	800	ALPHA (incorporated)	8.5	mechanical clutch	semi-intensive

Deimos 700 also available in FAST version.
Please see General Catalogue for more information.

RESIDENTIAL USE

DEIMOS BT

ELECTROMECHANICAL OPERATOR FOR SLIDING GATES



24V

- **24V** electromechanical operator for intensive use for gates up to **500 Kg (BT)**.
- Electromechanical limit switches and electronic slow-down system.
- Control unit **NETTUNO S (BT NET)** and **QSCD-MA (BT)** with obstruction detection and with built-in receiver.

DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(kg)		(m/min)		
<input type="checkbox"/> DEIMOS BT P925178 00005	24	500	QSCD MA (incorporated)	12	motion reverse on obstruction detection	intensive

COMMERCIAL AND INDUSTRIAL USE

ARES

ELECTROMECHANICAL OPERATOR FOR SLIDING GATES



24V

- **24V** electromechanical operator for intensive use for gates up to **1,500 Kg**.
- Electromechanical limit switches and electronic slow-down system.
- Control unit **(H-QSCD)** with obstruction detection and with built-in receiver.

DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(kg)		(m/min)		
<small>Available from 02/2010</small> <input type="checkbox"/> ARES 1000 P926183 00002	24	1,000	QSC-D (incorporated)	9	motion reverse on obstruction detection	intensive
<small>Available from 12/2009</small> <input type="checkbox"/> ARES 1500 P926182 00002	24	1,500	QSC-D (incorporated)	9	motion reverse on obstruction detection	intensive

ARES 1000 and ARES 1500 also available in FAST version.
Please see General Catalogue for more information.

NOTE: THE URANO BT IS AVAILABLE WHILE STOCKS LAST.

COMMERCIAL AND INDUSTRIAL USE

ICARO MA

ELECTROMECHANICAL OPERATOR FOR SLIDING GATES



D-TRACK



- **240V** electromechanical operator for residential use for gates up to **2,000 Kg**.
- Electromechanical limit switches and electronic slow-down system.
- Control unit **(LEO D MA)** with obstruction detection and with built-in receiver.

DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	REACTION TO IMPACT	USE
	(V)	(kg)		(m/min)		
<input type="checkbox"/> ICARO MA P925180 00006	240	2,000	LEO D-MA (incorporated)	9	motion reverse on obstruction detection	very intensive

ICARO MA also available in FAST version.
Please see General Catalogue for more information.

INDUSTRIAL USE

SP4000

ELECTROMECHANICAL OPERATOR FOR SLIDING GATES



- Three-phase **400V** electromechanical operator for very intensive use for gates up to **4,000 Kg**.
- Electromechanical limit switches and Sirio Tel control unit.
- Hydrodynamic coupling for soft start and soft stop.

DESCRIPTION	VOLTAGE	MAX GATE WEIGHT	CONTROL UNIT	OPENING SPEED	USE
	(V)	(kg)		(m/min)	
<input type="checkbox"/> SP4000 P925169 00001	240/400 three-phase	4,000	SIRIO TEL (incorporated)	10	very intensive

SP4000 also available in FAST version.
Please see General Catalogue for more information.

THERE IS A WHOLE WORLD THAT IS MOVED **BY US.**



For over 25 years BFT has been providing individuals, professionals and businesses with cutting edge solutions for all their automation needs. BFT operates in 120 countries worldwide, with 11 subsidiaries and over 500 distributors.



Automation for gates, garages and doors. Domestic and industrial.